


GEOTEXTILE 6 OZ.

Permalon®

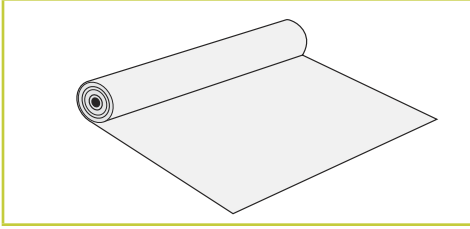

Geotextile 6 oz. is a needle-punched, nonwoven, polypropylene geotextile fabric.

PHYSICAL PROPERTIES AND TYPICAL VALUES

PROPERTY	ASTM TEST METHOD	U.S. VALUE	METRIC VALUE
Weight	D-751	6.0 oz/yd ²	200 gm/m ²
Grab Tensile	D-882	160 LBF	712 N
Grab Elongation	D-882	50 %	50 %
Puncture Strength	D-882	90 LBS	400 N
Mullen Burst	D-2261	315 PSI	2170 KPA
Trapezoidal Tear	D-4533	65 LBS	285 N
Permittivity	D-1709	1.60 Sec ⁻¹	1.60 Sec ⁻¹
Water Flow Rate	D-1790	110 GPM/FT ²	4480 LPM/M ²

AVAILABLE COLORS

Black

REEF INDUSTRIES, INC.
The Manufacturing Leader of Specialized Industrial Plastic Films Since 1957.

GEOTEXTILE 6 OZ.

PERMALON®

PRODUCT INFORMATION • SPECIFICATION GUIDE

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

©2006 REEF INDUSTRIES, INC. Reef Industries, Inc. 09-06

TOLLFREE 1.800.231.6074

9209 Alameda Genoa Rd. • Houston, Texas 77075

P: 713.507.4251 • F: 713.507.4295

Email: ri@reefindustries.com

