


GRIFF-SHRINK 3-PLY

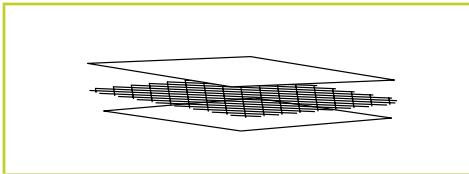

Griff-Shrink® 3-ply Clear is a reinforced 3-ply laminate that is heat-shrinkable. The reinforcement grid of high strength cord provides a uniform loading resistance in all directions and contains at least 50 strands per square foot. The top outside layer is UV stabilized film, and the bottom inner layer is shrink film. It is specifically engineered to provide high strength and durability in a lightweight material.

PHYSICAL PROPERTIES AND TYPICAL VALUES	PROPERTY	ASTM TEST METHOD	U.S. VALUE	METRIC VALUE
	Weight	D-751	26 LB/1000 FT ²	12.7 KG/100 M ²
	Thickness	D-2103	5 MIL	0.13 MM
	3" Load @ Yield	D-882	90 LBF	400 N
	3" Load @ Break	D-882	50 LBF	222 N
			3200 PSI	22.1 MPA
	3" Elongation @ Break	D-882	50 %	50 %
	Tongue Tear	D-2261	10.2 LBF	45 N
	Trapezoidal Tear	D-4533	17 LBF	75 N
	PPT Resistance	D-2582	19.5 LBF	87 N
Dart Impact Strength	D-1709	2.2 LBS	1.0 KG	

FEATURES

- Griff-Shrink® combines the strength of reinforced Griffolyn® materials with the properties of regular shrink wrap to cut the costs of conventional product packaging, shipping and storage problems.
- High Strength cord reinforcement resists tears.
- UV stabilization protects the material from degradation during extended exposure to sunlight.
- Cold-crack resistance provides protection in extremely cold temperatures.
- Low permeability greatly inhibits moisture transmission.
- Flexibility and light weight allow for easy handling and quick installation.
- Custom fabrication is available to meet your exact specifications.
- Protects the largest shipments.
- Provides cost savings by eliminating secondary cleaning operations.

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

©2009 REEF INDUSTRIES, INC. Griffolyn is a registered trademark of Reef Industries, Inc. 03-09

TOLLFREE 1.800.231.6074

9209 Alameda Genoa Rd. • Houston, Texas 77075
 P: 713.507.4251 • F: 713.507.4295
 Email: ri@reefindustries.com

REEF INDUSTRIES, INC.
 The Manufacturing Leader of Specialized Industrial Plastic Films Since 1957.

SHRINK 3-PLY
GRIFFOLYN®

PRODUCT INFORMATION • SPECIFICATION GUIDE



SUGGESTED APPLICATIONS

- Shipping container covers and liners.
- Bags and tubing (printing available).
- Industrial Packaging.
- Custom covers and outside storage.

ORDERING INFORMATION

AVAILABLE COLORS:

Clear, for quick identification of covered items.

SIZES:

Standard rolls 4' x 900' are available for immediate shipment. Custom fabrication is available to meet your exact specifications. Specify (length x width x height) for preformed bags or (length x width) for cut flat sheets.

USABLE TEMPERATURE RANGE:

Minimum: -15°F -26.6°C

Maximum: 170°F 77°C

OUTDOOR EXPOSURE

Under normal continuous exposure the average life expectancy ranges from 12 to 18 months.

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

©2009 REEF INDUSTRIES, INC. Griffolyn is a registered trademark of Reef Industries, Inc. 03-09

TOLLFREE 1.800.231.6074

9209 Almeda Genoa Rd. • Houston, Texas 77075

P: 713.507.4251 • F: 713.507.4295

Email: ri@reefindustries.com

