


# GRIFFOLYN® TYPE-65 G

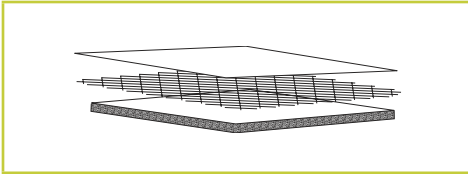

Griffolyn® Type-65 G is a 3-ply laminate combining two layers of high density polyethylene and a high-strength cord grid with a layer of non-woven geotextile fiber. It is specifically engineered to provide high strength and durability in a lightweight material.

## PHYSICAL PROPERTIES AND TYPICAL VALUES

PROPERTY	ASTM TEST METHOD	U.S. VALUE	METRIC VALUE
Weight	D-3776	76 LB/1000 FT <sup>2</sup>	37.1 KG/100 M <sup>2</sup>
3" Tensile Strength	D-882	190 LBF	845 N
Puncture Strength	D-4833	102 LBF	450 N
PPT Resistance	D-2582	56 LBF	249 N
Dart Impact Strength	D-1709	4.85 LBS	2200 g
Cold Impact Strength	D-1790	-40°F	-40°C
Permeance	E-96	0.038 Grain/Hr•Ft <sup>2</sup> •in.Hg	2.125 NG/(PA•S•M <sup>2</sup> )

## FEATURES

- Multiple layers and cord reinforcement combined with the geotextile layer offer extremely high puncture and tear resistance.
- UV stabilization protects the material from degradation during extended exposure to sunlight.
- Cold-crack resistance eliminates failures in extremely cold temperatures.
- Low permeability greatly inhibits moisture transmission.
- Flexibility and light weight allow for easy handling and quick installation.
- Custom fabrication is available to meet your exact specifications.
- Class A, ASTM E-1745-97 Standard Specification for Water Vapor Retarders Used in Contact With Soil or Granular Fill Under Concrete Slabs.

## SUGGESTED APPLICATIONS

Architectural vapor retarder under slab on grade.

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

©2006 REEF INDUSTRIES, INC. Griffolyn is a registered trademark of Reef Industries, Inc. 09-06

**TOLLFREE 1.800.231.6074**

9209 Alameda Genoa Rd. • Houston, Texas 77075

P: 713.507.4251 • F: 713.507.4295

Email: [ri@reefindustries.com](mailto:ri@reefindustries.com)

**REEF INDUSTRIES, INC.**

The Manufacturing Leader of Specialized Industrial Plastic Films Since 1957.

TYPE-65 G

GRIFFOLYN®

PRODUCT INFORMATION • SPECIFICATION GUIDE



## ORDERING INFORMATION

### AVAILABLE COLORS:

Black

### SIZES:

Standard rolls from 4' x 100' to 40' x 100' in increments of 4' widths are available for immediate shipment. Standard length and width tolerances are  $\pm 1\%$  (minimum 2")

Custom sizes up to 100' x 100' and custom fabrication are available to meet your exact specifications.

### USABLE TEMPERATURE RANGE:

Minimum: -25°F -31.6°C

Maximum: 170°F 77°C

## OUTDOOR EXPOSURE

Under normal continuous exposure the average life expectancy ranges from 18 to 30 months, depending on color.

The information provided herein is based upon data believed to be reliable. All testing is performed in accordance with ASTM standards and procedures. All values are typical and nominal and do not represent either minimum or maximum performance of the product. Although the information is accurate to the best of our knowledge and belief, no representation of warranty or guarantee is made as to the suitability or completeness of such information. Likewise, no representation of warranty or guarantee, expressed or implied, or merchantability, fitness or otherwise, is made as to product application for a particular use.

©2006 REEF INDUSTRIES, INC. Griffolyn is a registered trademark of Reef Industries, Inc. 09-06

**TOLLFREE 1.800.231.6074**

9209 Alameda Genoa Rd. • Houston, Texas 77075

P: 713.507.4251 • F: 713.507.4295

Email: [ri@reefindustries.com](mailto:ri@reefindustries.com)

